


Style 691

Description:

Braided from 100% genuine GFO® fiber, a filament yarn made from finely ground particles of high quality graphite encapsulated in a Teflon® matrix to eliminate graphite migration. For use in valves, centrifugal pumps, rotary pumps, reciprocating pumps, this packing combines the heat dissipation properties of Graphite, with the chemical resistance of Teflon®.

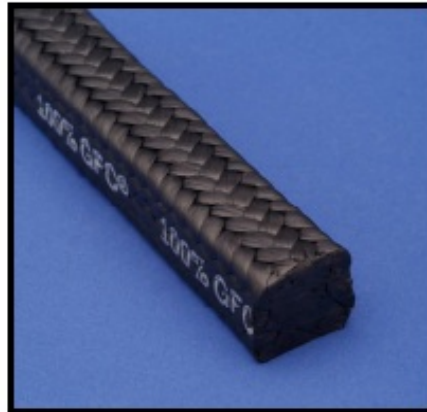

Style Number:	691
Service:	Pump and Valve Packing
Product Type :	Braided Packing
Construction:	Interlock Braid
Temperature Rating:	550° F / 290°C
pH Rating:	0 - 14
Shaft Speed Rating:	4400 FPM / 22 MPS
Pressure Rating:	1800 PSI/124 BAR Valve 300 PSI/20 BAR Pump