


Kevlar 665/GFO

Description:

Braided from genuine GFO® fiber, a filament yarn made from finely ground particles of high quality graphite encapsulated in a Teflon® matrix to eliminate graphite migration, and Kevlar® corners for superior abrasion resistance. For use in valves, Centrifugal pumps, rotary pumps, reciprocating pumps, this packing is ideal for use in most corrosive and abrasive applications.

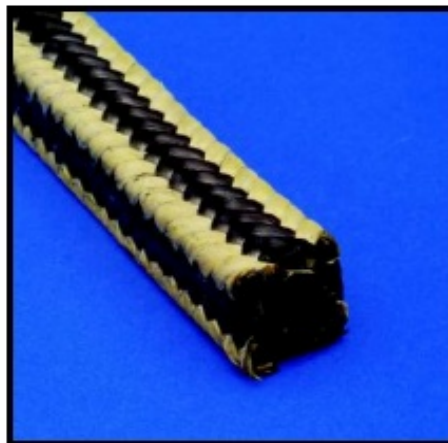

Style Number: 665/GFO
Service: Pump and Valve Packing
Product Type : Braided Packing
Construction: Interlock Braid
Temperature Rating: 550° F / 275°C
pH Rating: 0 - 14
Shaft Speed Rating: 2500 FPM / 13 MPS
Pressure Rating: 300 PSI / 20 BA