



**American Seal & Packing**  
 Division of Steadman and Associates, Inc.




10661 Ellis Avenue, Unit E  
 Fountain Valley, CA 92708  
 (714) 593-9780 ; Fax (714) 593-9701  
 www.aspseal.com

# Product Bulletin

## ASP-649 Carbon PTFE Packing

Non-Asbestos Corrosion Resistant Packing

<b>Fiber Family:</b>	<b>Carbon</b>
<b>Construction:</b>	<b>Carbonized Filament Yarn Impregnated with PTFE.</b>
<b>Braid:</b>	<b>Interlocked</b>
<b>Service Temperature:</b>	<b>-200°F to 662°F .</b>
<b>Service Pressure:</b>	<b>500 psi (34 bar) Rotary</b>
<b>pH Range:</b>	<b>1 – 13</b>
<b>Speeds:</b>	<b>2500 fpm</b>
<b>Lubrication:</b>	<b>PTFE</b>

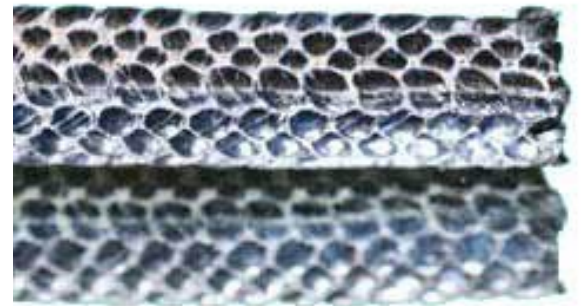

FEATURES:	BENEFITS:
<ul style="list-style-type: none"> <li>• Carbon Filament Yarn.</li> <li>• PTFE Impregnation.</li> <li>• Crosslock Braid Construction.</li> </ul>	<ul style="list-style-type: none"> <li>• Outstanding resistance to corrosion.</li> <li>• Low friction coefficient.</li> <li>• Accommodates high surface speeds.</li> <li>• Gives packing additional strength.</li> </ul>

**Applications:** **Digesters, Pumps and Valves**

**Sizes & Availability:** **1/8-inch and up cross sections in 1/16**